

Jane Addamsstraat 4  
 5491 DE St. Oedenrode - Holland  
 Tel. +31 (0) 413-483100  
 Fax +31 (0) 413-483101  
 www.genugten-agri.com  
 E-mail: info@genugten-agri.nl

**GENUGTEN AGRI BV**



# Roof and wall construction

**Genugten Agri B.V. supplies and installs various panels and sheets for roof covering and wall cladding. Steel profiled sheets, sandwich panels or fibre cement corrugated sheets can be selected for roof covering, whereas steel profiled sheets and sandwich panels are available for wall cladding.**


## Steel profiled sheets for roofs

Not only do steel profile sheets have a lower weight, but they are also suitable for large purlin distances of 1.5 to 1.8 metres. In addition, the price per m<sup>2</sup> of roof will be lower than with conventional corrugated sheeting, because it is no longer necessary to take a 15% overlap into account. The sheets can be supplied in various colours, with thick HPS or plastisol coating, enabling a 10-year guarantee to be given. The sheets are delivered to size for lengths of up to 15 metres, ensuring much faster installation than would be the case with regular roofing sheets. If local government regulations require corrugated sheeting to be installed, we can supply black steel corrugated sheeting.




## Selection of profiles for roofing sheets


58KD/945



42/960



30KD/1050




## Steel profiled sheets for walls


Genugten Agri B.V. supplies various steel profiled sheets for end walls and other walls. These profiled sheets come in thicknesses of 0.63 mm and up and can be provided with silicone polyester coating or with a 200 µ thick HPS or plastisol coating layer. All profiles and sections required for finishing corners, ridges etc. are supplied in the same colours as the roofing and wall sheeting.

## Selection of profiles for wall sheeting


35/1035

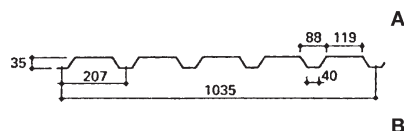

19/1050

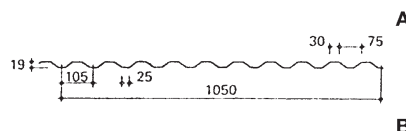

30/1100

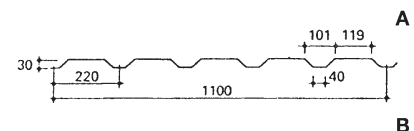



## Sandwich panels



Genugten Agri B.V. also supplies various sandwich panels for roofing and wall cladding. These panels are available in various thicknesses and colours. The colours depend on the coating applied to the panels, i.e.: silicon polyester, 200 µm thick HPS or plastisol coating. The panels are available cut to length for lengths up to 16.50 metres. The roofing panels are placed on the roof with a suction cup. The sandwich panels come in

various versions. Besides sandwich panels, eco panels are also available. These panels do not have an inner steel sheet.